



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/22, H04M 15/28</b>	<b>A1</b>	(11) International Publication Number: <b>WO 96/24226</b>
		(43) International Publication Date: 8 August 1996 (08.08.96)

(21) International Application Number: PCT/US96/01456

(22) International Filing Date: 31 January 1996 (31.01.96)

(30) Priority Data:  
382,471 31 January 1995 (31.01.95) US(71) Applicant: QUALCOMM INCORPORATED [US/US]; 6455  
Lusk Boulevard, San Diego, CA 92121 (US).(72) Inventors: TIEDEMANN, Edward, G., Jr.; 4350 Bromfield  
Avenue, San Diego, CA 92122 (US). HSU, Chih-Ping; 7185  
Celome Court, San Diego, CA 92129 (US).(74) Agent: MILLER, Russell, B.; Qualcomm Incorporated, 6455  
Lusk Boulevard, San Diego, CA 92121 (US).(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY,  
CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS,  
JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD,  
MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD,  
SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO  
patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ,  
BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH,  
DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE),  
OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR,  
NE, SN, TD, TG).

## Published

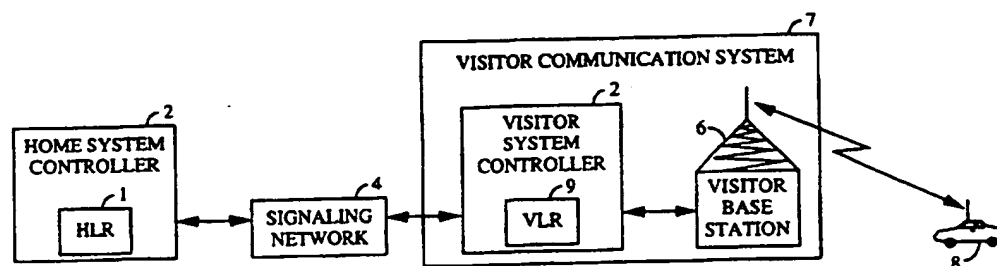*With international search report.**Before the expiration of the time limit for amending the  
claims and to be republished in the event of the receipt of  
amendments.*(54) Title: METHOD AND SYSTEM FOR PROVIDING A CHARGING INDICATION TO A MOBILE RADIO  
STATION

## (57) Abstract

A method and apparatus for providing a mobile station user (8) with information about anticipated roaming charges. The visitor communication system (7) transmits a graded roaming signal to the mobile station user (8) indicative of the anticipated roaming costs. The graded roaming signal is determined by contractual agreements between the visitor communication system provider and user's service provider. This information is stored in a database at the user's home communication system (2) and is provided to the visitor communication system (7) upon request for authorization to provide service. The graded roaming signal is broadcast to the mobile station (8) and displayed to allow the mobile station user to estimate the cost of the service being provided.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## Method and System for Providing a Charging Indication to a Mobile Radio Station

**BACKGROUND OF THE INVENTION**

5

**I. Field of the Invention**

The present invention relates to mobile telephony. More particularly, the present invention relates to a novel and improved method and apparatus for providing roaming indication indicative of anticipated roaming charges.

**II. Description of the Related Art**

15 As mobile communication systems become more prevalent in society the demands for greater and more sophisticated service have grown. To meet the capacity needs of mobile communication systems, techniques of multiple access to a limited communication resource have been developed. The use of code division multiple access (CDMA) modulation techniques is one of several techniques for facilitating communications in which a large number of system users are present. Other multiple access communication system techniques, such as time division multiple access (TDMA) and frequency division multiple access (FDMA) are known in the art. However, the spread spectrum modulation technique of CDMA has significant advantages over these modulation techniques for multiple access communication systems.

The use of CDMA techniques in a multiple access communication system is disclosed in U.S. Patent No. 4,901,307, issued February 13, 1990, entitled "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS", assigned to the assignee of the present invention, of which the disclosure thereof is incorporated by reference herein. The use of CDMA techniques in a multiple access communication system is further disclosed in U.S. Patent No. 5,103,459, issued April 7, 1992, entitled "SYSTEM AND METHOD FOR GENERATING SIGNAL WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM", assigned to the assignee of the present invention, of which the disclosure thereof is incorporated by reference herein.

Users of mobile telephones have desired to be able to use their mobile phone regardless of their location. This desire caused mobile communications providers to negotiate contracts among themselves to provide services known as "roaming" to their customers. A "roamer" is a

mobile station which requires service in a system which is operated by a mobile communications service provider other than the one to which the user subscribes.

Currently when a mobile station is roaming, a signal indicative of the roaming condition is provided to the user and displayed as a result of a comparison of the system identification (SID) of the subscribed system which is semi-permanently stored in the mobile station with the SID of the system providing service broadcast from the base station. This alerts the user of the mobile station that the service being provided is accruing roaming costs. Because the contracts between different companies differ, a roamer is typically assuming an unknown risk as to the cost of the service being provided, since he knows neither of the contracts between the service provider and system to which he subscribes nor does he know the identity of the provider of the roaming service.

## SUMMARY OF THE INVENTION

The present invention is a novel and improved method and apparatus for providing a user of a mobile station with a notice indicative of anticipated expenses of the roaming service being provided. In the present invention, when a mobile station registers with a communication system operated by a service provider other than the provider to which he subscribes, hereafter referred to as the visitor communication system, the visitor communication system will transmit a signal indicative of the costs of the anticipated roaming charges.

When a mobile station registers with the visitor communication system, the visitor communication system sends an authorization request message to the mobile station user's home communication system. the mobile station user's home communication system is the system to which the user subscribes service. The home communication system provides a graded roaming signal indicative of the anticipated roaming charges. The anticipated roaming charges are typically based on the contractual agreements between the home communication system service provider and the visitor communication system service provider. A signal indicative of the anticipated roaming charges is transmitted to the mobile station and displayed for the user.

In a preferred embodiment the graded roaming signal is provided over a control channel (paging channel) prior to start of communications on a voice or data channel (traffic channel) and could be part of the indication that the registration is accepted. In an alternative embodiment

the call is set up and the graded roaming signal is provided over the traffic channel. This allows the mobile station user to make a timely decision as to whether to conduct the service based upon the anticipated cost. Ideally all service providers would be required to provide the graded roaming signal to a roaming user for the benefit of mobile station users.

When the graded roaming signal is transmitted to the mobile station user, the information is provided to the mobile station user. In the exemplary embodiment, the signal indicates the anticipated roaming costs charged by the visitor communication system provider relative to those costs charged by to other providers. In the exemplary embodiment, a relative signal such as a number of dollars signs is displayed on a visual screen of the mobile station to alert the user of the anticipated roaming costs. It is unlikely that the system can provide absolute billing information, because factors such as group discounts and bulk discounts make it difficult to provide of real time billing information. However, if real time billing is possible, then the base station can provide an indication of the actual cost of the service being provided, which the mobile station may then display the absolute cost of the service being received.

In an alternative embodiment, which is useful in the case where the visitor communication system does not have a timely connection to the home communication system, the visitor communication system transmits to the mobile station an identification signal which the mobile station then displays the name of the visitor communication system service provider for the user. By knowing the name of the visitor communication system service provider, the user can make a more educated estimate of the roaming costs.

### BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

Figure 1 is a block diagram illustrating an exemplary system implementation of the present invention; and

Figure 2 is a block diagram illustrating an exemplary embodiment of the apparatus of the present invention.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figure 1, when mobile station 8 enters a geographical situation that prevents it from obtaining service from the home communication system mobile station 8 registers with a visitor communication system 7. In the exemplary embodiment, mobile station 8 is spread spectrum mobile station as is detailed in the aforementioned U.S. Patent Nos. 4,901,307 and 5,103,459.

Mobile station 8 provides identification information to visitor base station 6. Visitor base station 6 then provides the information to visitor system controller 5. Visitor system controller 5 contains the visitor location register (VLR) 9. The visitor location register (VLR) maintains records, for billing purposes, of all service being provided to roaming stations such as mobile station 8. Visitor communication system 7 seeks authorization to provide service from the home communication system of mobile station 8.

Visitor communication system 7 sends a request to provide service through signaling network 4 to home system controller 2. Home system controller 2 contains a data base referred to as home location register (HLR) 1. HLR 1 contains user profile information comprising an authorization to permit roaming, user features, and information about anticipated roaming costs based upon contractual agreements between the home communication system provider and the visitor communication system provider. In the exemplary embodiment, the graded roaming signal is a relative indication of how the roaming charges of the visitor communication system provider compare to other companies' roaming charges.

Home system controller 2 provides the information including an authorization to permit roaming, user features, and information about anticipated roaming costs through signaling network 4 to visitor communication system 7. In the exemplary embodiment, when visitor communication system 7 receives the registration accepted order, the graded roaming signal is transmitted to mobile station 8 prior to or during call set up.

An indication of the graded roaming signal is then displayed by mobile station 8, which allows the user to estimate the likely roaming charges. In the exemplary embodiment, mobile station 8 displays a plurality of dollar signs on a display screen the number of which are indicative of the estimated relative roaming costs. The larger the number of dollar signs

displayed the larger the estimated roaming costs, the fewer the number of dollar signs displayed the lower the estimated roaming costs.

In an alternative embodiment, the user of mobile station 8 is provided a standard text signal by visitor communication system 7. The standard text signal identifies the carrier providing the roaming service to the mobile station user. An exemplary embodiment of the standard text signal is an ASCII text signal. By knowing the identity of the carrier providing service, the user of mobile station 8 can make a more educated estimate of the anticipated roaming charges. In the exemplary embodiment, mobile station 8 displays the name of the visitor communication system service provider in plain text on a display screen of mobile station 8.

Figure 2 illustrates a block diagram of the communications system of the present invention. When mobile station 16 attempts to obtain service in an area served by the visitor communication system 14, then mobile station 16 sends a roaming request signal to visitor communication system 14. It should be noted that the functions of the visitor base station and visitor system controller are illustrated in one integrated element as visitor communication system 14. This is for simplicity because the functions of the base station and system controller can be divided in a variety of ways, as is well known in the art.

User identification generator 50 generates a signal identifying mobile station 16 and its home communication system. The signal may also include information as to the type of service requested and an identification of the capabilities of mobile station 16.

The request message is provided by generator 50 to encoder/modulator 48 which encodes and modulates the signal for transmission. In the exemplary embodiment, the modulation format used is a CDMA spread spectrum modulation format as described in the aforementioned U.S. Patent Nos. 4,901,307 and 5,103,459, although other digital modulation techniques such as TDMA could be used. The modulated message signal is provided to transmitter (TMTR) 46 which upconverts and amplifies the signal. The amplified and upconverted signal is provided through duplexer 44 for broadcast through antenna 42. In an alternative embodiment such as an analog system the encoder function is not required.

The broadcast signal from mobile station 16 is received at antenna 32 of visitor communication system 14. The received signal is provided to receiver 30 which downconverts and amplifies the signal. The received signal is then provided to decoder/demodulator 28. In the exemplary

embodiment, the demodulation format used is a CDMA spread spectrum demodulation format as described in the aforementioned U.S. Patent Nos. 4,901,307 and 5,103,459, although other digital demodulation formats could be used. The demodulated signal is provided to roaming request generator  
5 26. Generator 26 generates a packet that contains the identification of mobile station 16, an identification of the system provider of visitor communication system 14 and is addressed to home system controller 10. The packet may also contain information regarding the service requested.

The roaming request packet is provided by generator 26 to network  
10 transmitter 24 which formats, modulates and amplifies the signal for transmission to home system controller 10. The packet is provided through signaling network 12 to home communication system controller 10. Signaling network 12 can be either a public switching transmission network (PSTN) or it can be a network specifically designed to carry messages  
15 between different service providers.

The signal is received at home system controller receiver (RCVR) 20. Home system controller receiver 20 downconverts and amplifies the received signal and provides the information to roaming information determination element 18. Information determination element 18 can be  
20 implemented by a microprocessor used in conjunction with a database storage as is well known in the art. Determination element 18 validates the identity of the user and determines if the user is permitted to roam. In addition, determination element 18 determines from the identity of the service provider of visitor communication system 14 what the anticipated  
25 roaming cost to the user of mobile station 16 is likely to be. The anticipated roaming cost is based on contracts between the two service providers. The anticipated roaming cost may also be affected by the type of service requested.

Roaming information determination generates a signal indicative of  
30 the anticipated roaming cost and provides this signal to home system controller transmitter (TMTR) 22. Transmitter 22 formats, modulates, upconverts and amplifies the signal for transmission through signaling network 12 to visitor communication system 14.

The anticipated roaming cost signal is received by visitor  
35 communication system network receiver 34. Network receiver 34 demodulates, downconverts and amplifies the received signal. The received signal is then provided to modulator/encoder 36. Modulator/encoder 36 encodes and modulates the signal for transmission to mobile station 16. In the exemplary embodiment, the modulation format



used is a CDMA spread spectrum modulation format as described in the  
aforementioned U.S. Patent Nos. 4,901,307 and 5,103,459. The modulated  
signal is provided to transmitter (TMTR) 38 which upconverts and  
amplifies the signal, which is then broadcast through antenna 40. In the  
5 exemplary embodiment, the graded roaming signal is provided on the  
paging channel. In an alternative embodiment the graded roaming signal is  
provided as a preliminary transmission on the traffic channel.

The signal broadcast by visitor communication system 14 is received  
at antenna 42 and provided through duplexer 44 to receiver 52. Receiver 52  
10 downconverts and amplifies the received signal and provides the received  
signal to decoder/demodulator 54. Decoder/demodulator 54 demodulates  
and decodes the received signal and provides the anticipated roaming cost  
information signal to user display element 56. User display element 56 may  
be a visual display such as light emitting diode (LED) display or a liquid  
15 crystal display LCD, or user display 56 may be an auditory device for  
providing the anticipated roaming cost information to the mobile station  
user.

The previous description of the preferred embodiments is provided  
to enable any person skilled in the art to make or use the present invention.  
20 The various modifications to these embodiments will be readily apparent to  
those skilled in the art, and the generic principles defined herein may be  
applied to other embodiments without the use of the inventive faculty.  
Thus, the present invention is not intended to be limited to the  
embodiments shown herein but is to be accorded the widest scope consistent  
25 with the principles and novel features disclosed herein.

**WE CLAIM:**

## CLAIMS

1. A mobile station capable of displaying an indication of  
2 estimated roaming charges, comprising:  
receiver means for receiving a graded roaming signal; and  
4 display means for displaying a representation of said graded roaming  
signal.

2. The apparatus of Claim 1 wherein said graded roaming signal  
2 is indicative of relative roaming costs.

3. The apparatus of Claim 1 wherein said graded roaming signal  
2 is transmitted over a paging channel.

4. The apparatus of Claim 1 wherein said graded roaming signal  
2 is transmitted is a spread spectrum communication signal.

5. The apparatus of Claim 1 wherein said representation  
2 comprises a plurality of icons indicative of the relative roaming costs.

6. The apparatus of Claim 5 wherein said icons are dollar signs.

7. A mobile station capable of displaying an indication of  
2 estimated roaming charges, comprising:  
a receiver having an input for receiving a graded roaming signal and  
4 having an output; and  
a display having an input coupled to said receiver output for  
6 displaying a representation of said graded roaming signal.

8. The system of Claim 7 wherein said graded roaming signal is  
2 indicative of relative roaming costs.

9. The system of Claim 7 wherein said graded roaming signal is  
2 transmitted over a paging channel.

10. The system of Claim 7 wherein said graded roaming signal is  
2 transmitted is a spread spectrum communication signal.

11. The system of Claim 7 wherein said representation comprises a  
2 plurality of icons indicative of the relative roaming costs.

12. The system of Claim 11 wherein said icons are dollar signs.

13. In mobile station a method for providing roaming charge  
2 information, comprising the steps of:  
receiving a graded roaming signal; and  
4 displaying a representation of said graded roaming signal.

14. The method of Claim 13 wherein said graded roaming signal is  
2 indicative of relative roaming costs.

15. The method of Claim 13 wherein said graded roaming signal is  
2 transmitted over a paging channel.

16. The method of Claim 13 wherein said graded roaming signal is  
2 transmitted is a spread spectrum communication signal.

17. The method of Claim 13 wherein said representation  
2 comprises a plurality of icons indicative of the relative roaming costs.

18. The method of Claim 17 wherein said icons are dollar signs.

19. A visitor communication system, comprising:  
2 authentication means for receiving a visiting mobile station service  
request signal and for generating a roaming authorization message in  
4 accordance with said mobile station service request signal, and for sending  
said roaming authorization message to a visiting mobile station home  
6 location register; and

graded roaming charge transmitter means for receiving from said  
8 visiting mobile station home location register a graded roaming message  
and for transmitting a graded roaming signal.

20. The apparatus of Claim 20 wherein said graded roaming charge  
2 transmitter means transmits said graded roaming signal in accordance with  
a spread spectrum modulation format.

21. A visitor communication system, comprising:  
2 a visitor location identifier having an input for receiving a visiting  
mobile station service request signal and having an output for providing a  
4 roaming authorization message; and  
a transmitter means having an output for providing a graded  
6 roaming signal.

22. The apparatus of Claim 21 wherein said transmitter transmits  
2 said graded roaming signal in accordance with a spread spectrum  
modulation format.

23. In a visitor communication system, a method for providing a  
2 visiting mobile station user with a graded roaming signal, comprising the  
steps of:  
4 receiving a visiting mobile station service request signal;  
generating a roaming authorization message in accordance with said  
6 mobile station service request signal;  
sending said roaming authorization message to a visiting mobile  
8 station home location register; and  
receiving from said visiting mobile station home location register a  
10 graded roaming message; and  
transmitting a graded roaming signal.

24. The apparatus of Claim 23 wherein said step of transmitting  
2 said graded roaming charge transmits said graded roaming signal in  
accordance with a spread spectrum modulation format.

25. A home communication system, comprising:  
2 subscriber authorization means for receiving a roaming  
authorization message and for generating an authorization response  
4 message and for generating a graded roaming message; and  
transmitter for sending said authorization response message and said  
6 graded roaming message.

26. The apparatus of Claim 25 wherein said subscriber  
2 authorization means generates said graded roaming message in accordance  
with a contractual relation signal.

1/2

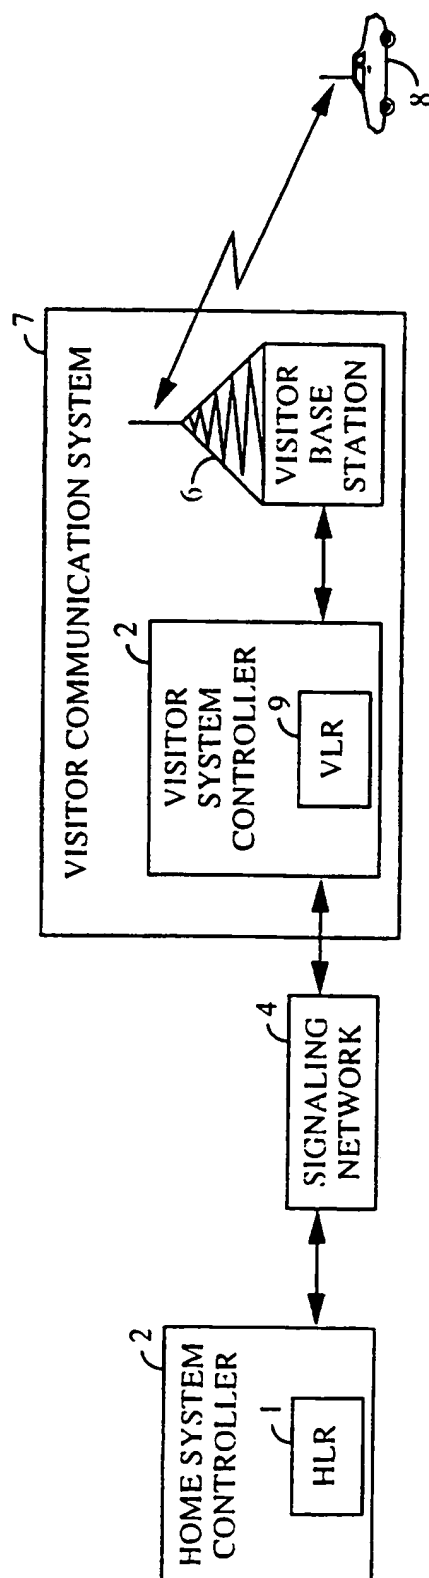


FIG. 1

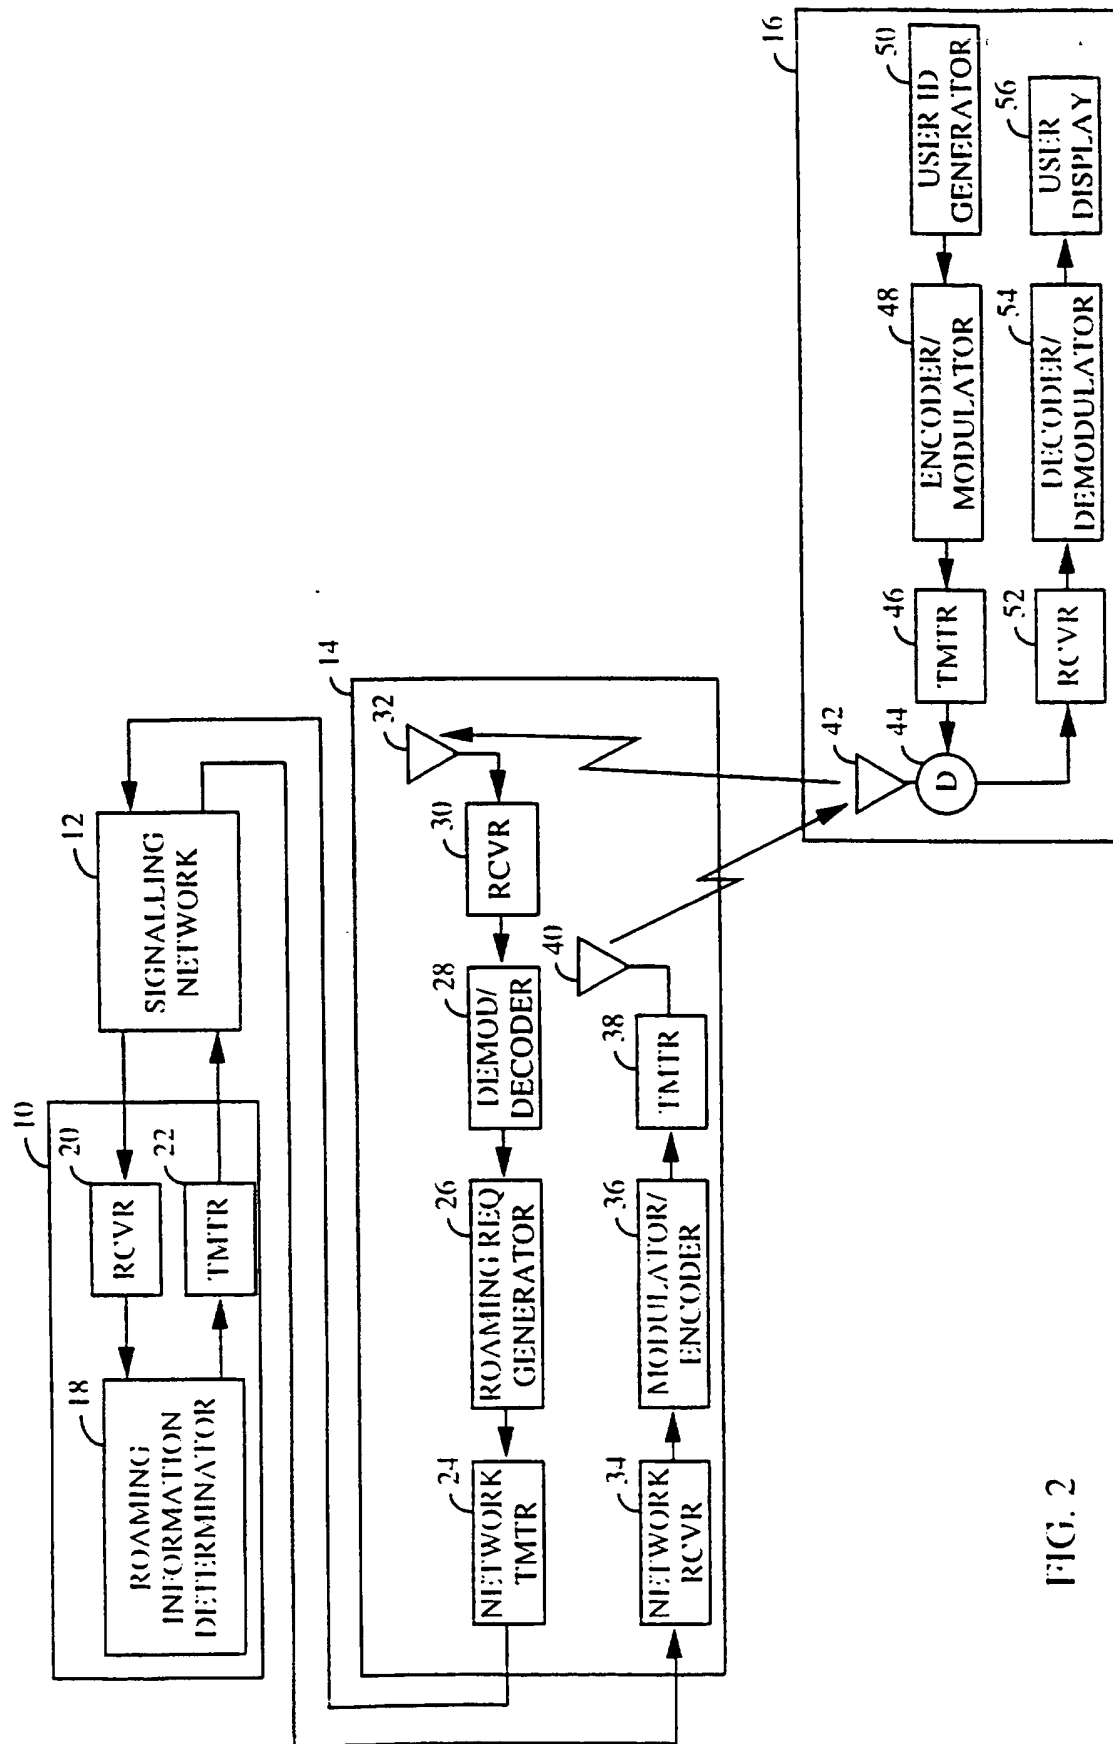


FIG. 2

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 96/01456

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04Q7/22 H04M15/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO,A,94 28670 (NOKIA TELECOMMUNICATIONS OY ET AL.) 8 December 1994 see page 6, line 7 - page 9, line 24  see page 11, line 7 - page 15, line 8 ---	1,2,7,8, 13,14 19,21, 23,25,26
X	EP,A,0 526 118 (MOTOROLA INC.) 3 February 1993 see column 4, line 23 - line 54 see column 5, line 9 - line 14 see column 7, line 16 - line 36 see column 9, line 47 - line 49 see column 10, line 11 - line 55 --- -/--	1-3,7-9, 13-15



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

2 July 1996

Date of mailing of the international search report

18. 07. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Behringer, L.V.

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 96/01456

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	<p>EP,A,0 647 055 (AT &amp; T CORP.) 5 April 1995</p> <p>see column 3, line 39 - line 58  see column 4, line 36 - line 57  see column 5, line 44 - line 53  see column 6, line 9 - line 15  see figure 1</p> <p>-----</p>	<p>1,2,7,8, 13,14</p>



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/01456

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9428670	08-12-94	FI-A- 932480 AU-B- 6798194	01-12-94 20-12-94
EP-A-0526118	03-02-93	US-A- 5303297 CA-A- 2064406 JP-A- 5199331	12-04-94 26-01-93 06-08-93
EP-A-0647055	05-04-95	JP-A- 7177264	14-07-95

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL SEARCH REPORT

Internatic Application No  
PCT/US 97/03742

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9512936 A		FI 953266 A	30-06-95
		FI 953267 A	22-08-95
		FI 953268 A	30-06-95
		JP 8510607 T	05-11-96
		JP 8508627 T	10-09-96
		JP 8508628 T	10-09-96
		JP 8508629 T	10-09-96
		JP 8508630 T	10-09-96
		JP 8508631 T	10-09-96
		JP 8509340 T	01-10-96
-----			
US 5420911 A	30-05-95	CA 2077095 A	01-03-93
		SE 9202453 A	01-03-93
-----			
US 5119397 A	02-06-92	NONE	
-----			

**This Page Blank (uspto)**